


# EN301 シリーズ

32ビット PCI-Bus 100BASE-FX イーサネット アダプタ

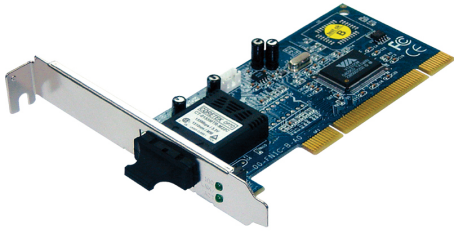

## 機能

本商品につきましては2021年7月31日をもって販売を終了させて頂きました。代替製品については [こちらのページ](#) をご覧ください。

- » PCI 2.2 Specification compliant
- » Separate 2K Bytes FIFO for receive and transmit controllers
- » Advanced Configuration Power Interface (ACPI):
  - Supports PC99, PC2001 and Net PC requirements
  - Supports PCI Bus Power Management Interface Specification Version 1.0/1.1
  - Supports ACPI Specification 1.0
  - Support Network Device Class Power Management Specification Version 1.0a
  - Wake-up supports magic packet
- » MAC Enhancement Function
  - UDP, TCP/IP checksum for IPv4 frames
  - Statistics of 12 sets of hardware Management Information BASE counters
- » Utilities
  - Windows auto installation
  - MS-DOS diagnostics
  - Desktop Management Interface (DMI) 2.0 (Vista is not support)
- » 0°C to 45°C (32°F to 113°F) operating temperature range

## 仕様

### Technology

#### Standards

- IEEE802.3u 100BASE-FX
- IEEE802.3x
- IEEE802.1Q

#### Protocols

- IEEE802.3x full-duplex flow control; Multiple pause frame XON/XOFF

#### Driver

- Microsoft Windows 95 (including OSR2), Windows 98 (including SE), Windows ME, Windows 2000, Windows XP, Windows Vista (32bit/64bit), Windows NT 4.0,
- Windows 7 (32bit/64bit)
- LAN Manager, LANtastic, PC-NFS
- Novell Netware 3.11, 3.12, 4.x, 5.x, 6.0, Client 32
- Linux Kernel 2.2.x/2.4.x/2.6.x
- FreeBSD 3.2, 4.0, 4.11, 4.2, 5.x
- SCO UnixWare 7.x/OpenUnix 8, SCO UNIX 5.0

---

### Power

#### Power Consumption

- 1W Max.

---

### Mechanical

#### Dimensions

- EN301: 133mm (L) x 117.5mm (W) ; 5.23" (L) x 4.62" (W)
- EN301L: 133mm (L) x 80mm (W) ; 5.23" (L) x 3.14" (W)

#### Weight

- 80g (0.18lb.)
-

## Interface

### Ethernet Port

- 100BASE-FX: 1 port

### LED Indicators

- Per Unit: Link/Activity, Speed
- 

## Environment

### Operating Temperature

- 0°C to 45°C (32°F to 113°F)

### Storage Temperature

- -10°C to 70°C (14°F to 158°F)

### Ambient Relative Humidity

- 5% to 95% (non-condensing)
- 

## Regulatory Approvals

### ISO


- Manufactured in an ISO9001 facility

### Emission Compliance

- FCC Part 15, Class B
  - CE Mark Class B
-

## 寸法図

Image not found or type unknown

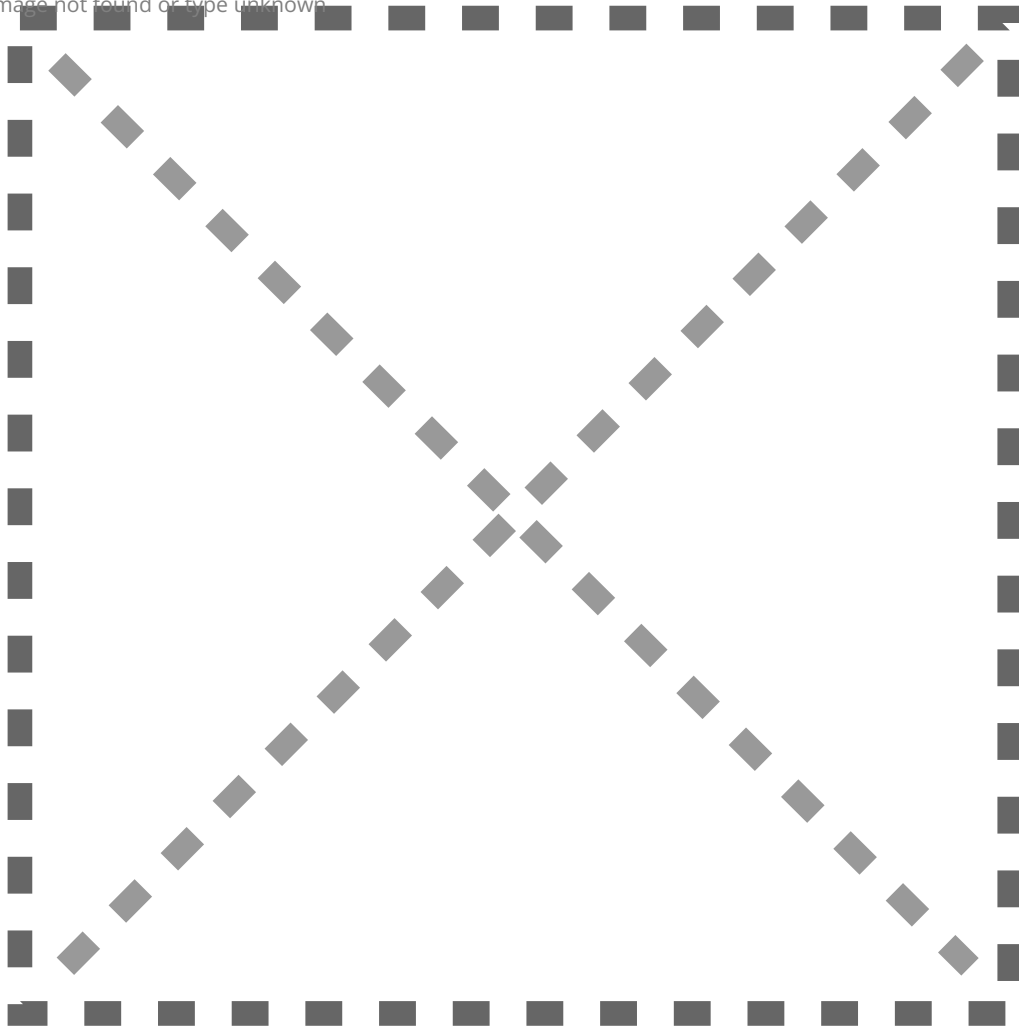

## 製品型番

### Model

EN301C	100BASE-FXMultiMode(SC) Ethernet Adapter
EN301T	100BASE-FXMultiMode(ST) Ethernet Adapter
EN301C-20	100BASE-FXSingleMode(SC)-20Km Ethernet Adapter
EN301C-40	100BASE-FXSingleMode(SC)-40Km Ethernet Adapter
EN301T-20	100BASE-FXSingleMode(ST)-20Km EthernetAdapter
EN301CB-20	100BASE-FXSingleMode(SC) WDM-TX:1310nm/RX:1550nm-20Km Ethernet Adapter
EN301CA-40	100BASE-FXSingleMode(SC) WDM-TX:1310nm/RX:1550nm-40Km Ethernet Adapter
EN301CB-40	100BASE-FXSingleMode(SC) WDM-TX:1550nm/RX:1310nm-40Km Ethernet Adapter
EN301LC	100BASE-FXMultiMode(SC) Ethernet Adapter with low-profile bracket
EN301LT	100BASE-FXMultiMode(ST) Ethernet Adapter with low-profile bracket
EN301LC-20	100BASE-FXSingleMode(SC)-20Km Ethernet Adapter with low-profile bracket
EN301LC-40	100BASE-FXSingleMode(SC)-40Km Ethernet Adapter with low-profile bracket
EN301LT-20	100BASE-FXSingleMode(ST)-20Km Ethernet Adapter with low-profile bracket
EN301LCA-20	100BASE-FXSingleMode(SC)WDM-TX:1310nm/RX:1550nm-20Km Ethernet Adapter with low-profile bracket
EN301LCB-20	100BASE-FXSingleMode(SC)WDM-TX:1550nm/RX:1310nm-20Km Ethernet Adapter with low-profile bracket
EN301LCA-40	100BASE-FXSingleMode(SC)WDM-TX:1310nm/RX:1550nm-40Km Ethernet Adapter with low-profile bracket
EN301LCB-40	100BASE-FXSingleMode(SC)WDM-TX:1550nm/RX:1310nm-40Km Etherne tAdapter with low-profile bracket



© EtherWAN Systems, Inc. All rights reserved. 20220721

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.