

EX19162A

Unmanaged 16-Port Gigabit PoE Ethernet Switch with 2-Port SFP and 2-Port RJ45









Overview

EtherWAN's EX19162A is a 20-port Gigabit Power over Ethernet switch with high performance and features suited for small-business and commercial environments. The EX19162A is equipped with 16 10/100/1000BASE-T(X) PoE+ ports along with 4 gigabit uplink ports (2 RJ45 and 2 SFP). With full wire speed throughput, port speeds up to gigabit for 4K cameras and higher, and a power budget of 250W, the EX19162A is the perfect solution for security networking.

Highlights

+ Power Over Ethernet

Total PoE power budget of 250W to deliver sufficient power to all connected PoE devices Overloading protection

Power and data over a single cable with gigabit speed capable of handling cameras with 4K resolution and higher and other high bandwidth devices



Hardware Specifications

+ Interface

Ethernet

10/100/1000BASE-T(X): 18 ports 10/100/1000BASE-T(X): 18 ports

LED Indicators

Per Unit: Power
Per Port PoE: Status
Per Port Link: Link/Activity

Reset Button

Restore factory default settings

+ Technology

Standards

IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x full duplex and flow control IEEE 802.3af Power over Ethernet

IEEE 802.3at Power over Ethernet (PoE+)

Switching Fabric

40Gbps

MAC Table Size

8K

Packet Buffer Memory

4Mb

Forward/Filtering Rate

14,880pps for 10Mbps 148,880pps for 100Mbps 1,488,000pps for 1000Mbps

Processing Type

Store-and-Forward
Auto-Negotiation
Half-duplex back-pressure full-duplex flow control
Auto MDI/MDIX

+ Power

Input

100-240VAC, 50/60Hz

Power Consumption

Device: 20W (Without PoE)

PoE Power Budget

250W

+ Physical

Casing Material

Metal

Dimensions

17.3" x 8.66" x 1.73" (W x D x H) 440 x 220 x 44mm (W x D x H)

Weight

6.6lbs (3Kg)

Installation Type

Rack Mounting



+ Environmental

Operating Temp.

32 to 122°F (0 to 50°C)

Storage Temp.

-4 to 176°F (-20 to 80°C)

Relative Humidity

10% to 90% (non-condensing)

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15 Class A

Safety

UL 62368-1

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

→ What's Included

Device

Ethernet Switch

Power

AC power cord


Installation

Mounting brackets, screws

Documentation

Quick install guide

Dimensions

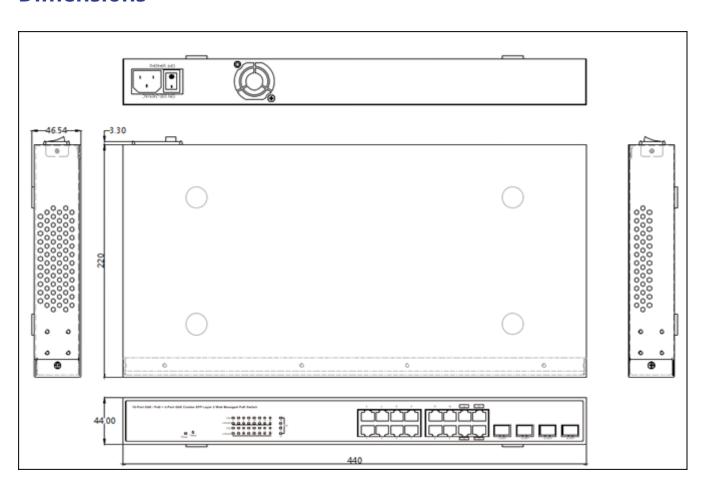



Ordering Info



EX19162A 18-port 10/100/1000BASE-T(X) (16 PoE) + 2 1000M SFP



^{*} Rack mounting kit included.