

EPOW-54-240

Hardened NEMA TS2 Power Supply 54V 240W











Overview

With a wide operating temperature range of -40 to 75°C (-40 to 167°F) and built with an aluminum fanless design, EtherWAN's EPOW-54-240 is a 54V 240W hardened power supply designed to operate in the most extreme environments. The EPOW-54-240 has a 240W power budget and built-in over-voltage and short-current protection, making it a perfect and reliable solution for PoE applications.

EtherWAN — "When Connectivity is Crucial."

Highlights

+ Reliable Power Delivery

Active built-in PFC for max power distribution efficiency Constant voltage across output terminal

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F) Fanless operation IP67 total dust protection and water resistance

→ NEMA TS2

Complies with NEMA TS1 & TS2 electrical and temperature requirements for traffic control equipment High impact, thermal shock, and electrical noise resistance

+ Easy Install

AC and DC cables pre-attached Mounting holes to install outdoors and or in cabinets



Hardware Specifications

+ Power

Input

100-277 VAC

Output

54 VDC

Protection

SVP/OVP (Over Voltage Protection)

<305 VAC

SCP (Short Circuit Protection)

+ Physical

Casing Material

Aluminum

IP Rating

IP67 (Dust Tight and Waterproof)

Dimensions

246 x 68 x 39mm (W x D x H) 9.69" x 2.68" x 1.54"

Weight

2.86lbs (1.3kg)

Installation Type

Wall mounting/panel mounted

+ Environmental

Operating Temp.

-40 to 75°C (-40 to 167°F)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

10% to 95% (non-condensing)

Operation Humidity

20-90%

Vibration Resistance

10~500HZ, 2G 10min/period

X, Y, Z line per hour

+ Regulatory

Standard

EN 61347-1

EN 61347-2-13

EN 62493

EMC Emission

EN 55015

EN 61000-3-2

EMC Immunity

EN 55015

EX 61000-4-2,3,4,5,6,8,11

+ Warranty

Length


3 Years

Details

www.etherwan.com/support/warranty-policy



Dimensions

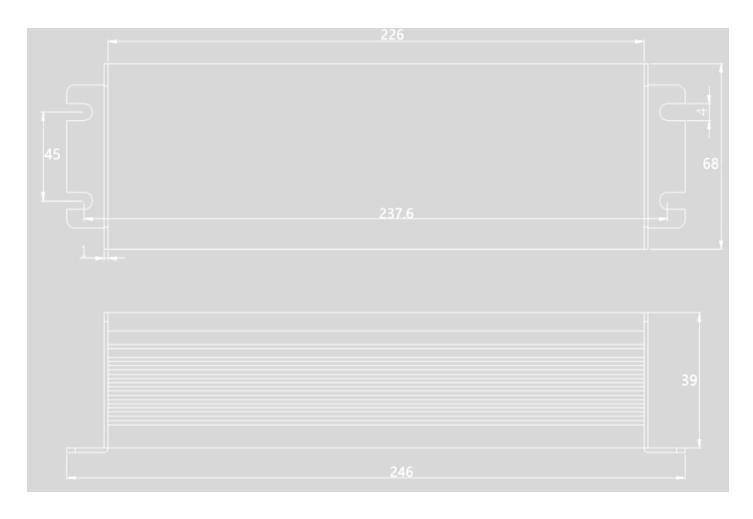

Ordering Info



Power Supply, Hardened (-40°C - +75°C) External 100-277 VAC Input; NEMA-TS2 rated; 240W, 54VDC, 0-11.1A with Open Wire (US Plug)



© EtherWAN Systems, Inc. All rights reserved. 20241105

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.