

# EX19162A

Unmanaged 16-Port Gigabit PoE Ethernet Switch with 2-Port SFP and 2-Port RJ45









### **Overview**

EtherWAN's EX19162A is a 20-port Gigabit Power over Ethernet switch with high performance and features suited for small-business and commercial environments. The EX19162A is equipped with 16 10/100/1000BASE-T(X) PoE+ ports along with 4 gigabit uplink ports (2 RJ45 and 2 SFP). With full wire speed throughput, port speeds up to gigabit for 4K cameras and higher, and a power budget of 250W, the EX19162A is the perfect solution for security networking.

# **Highlights**

# + Power Over Ethernet

Total PoE power budget of 250W to deliver sufficient power to all connected PoE devices Overloading protection

Power and data over a single cable with gigabit speed capable of handling cameras with 4K resolution and higher and other high bandwidth devices



# **Hardware Specifications**

## + Interface

#### **Ethernet**

10/100/1000BASE-T(X): 18 ports 10/100/1000BASE-T(X): 18 ports

#### **LED Indicators**

Per Unit: Power
Per Port PoE: Status
Per Port Link: Link/Activity

#### **Reset Button**

Restore factory default settings

## + Technology

#### **Standards**

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x full duplex and flow control

IEEE 802.3af Power over Ethernet

IEEE 802.3at Power over Ethernet (PoE+)

#### **Switching Fabric**

40Gbps

#### **MAC Table Size**

8K

### **Packet Buffer Memory**

4Mb

#### Forward/Filtering Rate

14,880pps for 10Mbps 148,880pps for 100Mbps 1,488,000pps for 1000Mbps

### **Processing Type**

Store-and-Forward
Auto-Negotiation
Half-duplex back-pressure full-duplex flow control
Auto MDI/MDIX

### + Power

#### Input

100-240VAC, 50/60Hz

#### **Power Consumption**

Device: 20W (Without PoE)

### **PoE Power Budget**

250W

### + Physical

### **Casing Material**

Metal

#### **Dimensions**

17.3" x 8.66" x 1.73" (W x D x H) 440 x 220 x 44mm (W x D x H)

#### Weight

6.6lbs (3Kg)

#### **Installation Type**

**Rack Mounting** 



### + Environmental

Operating Temp.

32 to 122°F (0 to 50°C)

Storage Temp.

-4 to 176°F (-20 to 80°C)

**Relative Humidity** 

10% to 90% (non-condensing)

# + Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15 Class A

Safety

UL 62368-1

## **+** Warranty

Length

Limited Lifetime

**Details** 

www.etherwan.com/support/warranty-policy

## → What's Included

Device

**Ethernet Switch** 

**Power** 

AC power cord


Installation

Mounting brackets, screws

**Documentation** 

Quick install guide

# **Dimensions**

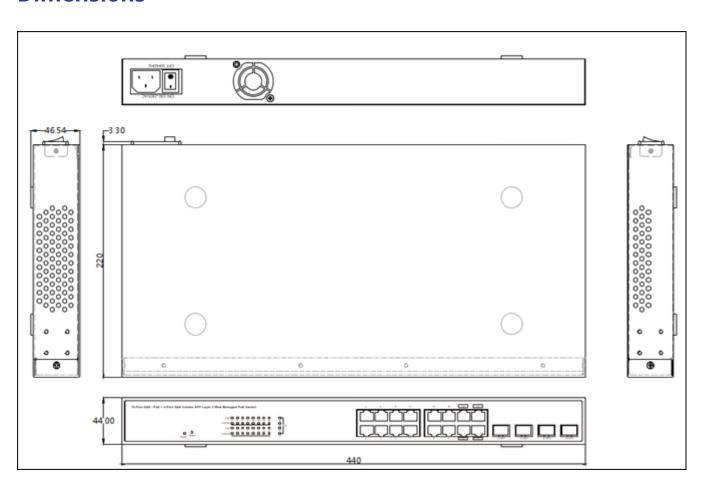



# **Ordering Info**



**EX19162A** 18-port 10/100/1000BASE-T(X) (16 PoE) + 2 1000M SFP



© EtherWAN Systems, Inc. All rights reserved. 20241022

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.

<sup>\*</sup> Rack mounting kit included.