

## EL2315 系列

10/100/1000BASE-TX - 100/1000BASE-X Dual Rate SFP 光電轉換器



### 產品介紹

EL2315 Gigabit光電轉換器系列支援10/100/1000BASE-T(X)和100/1000BASE SFP的光電轉換，同時兼容100BASE光纖或1000BASE光纖。透過DIP Switch指撥器，EL2315的SFP連接埠可彈性地支援100BASE SFP光纖或1000BASE-X SFP光纖連接埠，同時可選擇啟用或停用Link-Fault-Pass-Through (LFPT)故障傳遞功能，提升資訊傳輸的可靠性。EL2315 Gigabit光電轉換器支援高達9k位元組的巨型幀傳輸，是實現高效連接性的理想選擇。

### 產品亮點

#### + 支援全Gigabit頻寬

10/100/1000BASE-TX 和 1000BASE-SX/LX/BX 乙太網  
信號自動轉換  
光纖支持100BASE-FX和1000BASE-SX/LX相互轉換

#### + 支援Link-Fault-Pass-Through (LFPT)

針對光電轉換器連線狀態提供持續的監控  
當連線的其中一端光纖中斷訊，LFPT會中斷乙太網路  
(RJ-45)埠之連線，以告知連線之設備網路連線已中斷

#### + 支援100/1000BASE-FX 雙速率 SFP

可通過 DIP 指撥器切換100BASE 或 1000BASE SFP

## 產品規格

### + Technology

#### Standards

IEEE 802.3 10BASE-T  
IEEE 802.3u 100BASE-TX/100BASE-FX  
IEEE 802.3ab 1000BASE-T  
IEEE 802.3z 1000BASE-SX/1000BASE-LX  
IEEE 802.3x Full duplex and flow control

#### Forward and Filtering Rate

14,880pps for 10Mbps  
148,810pps for 100Mbps  
1,488,100pps for 1000Mbps

#### Processing Type

Store-and-Forward  
Auto Negotiation  
Half duplex back-pressure and IEEE 802.3x full-duplex flow control  
Auto-MDI/MDIX

### + Power

#### Input

12VDC

#### Power Consumption

2.76W Max. 0.23A@12VDC

### + Mechanical

#### Casing

Aluminum Case

#### Dimensions

80.3 x 109.2 x 23.8mm (W x D x H)  
(3.16" x 4.3" x 0.94")

#### Weight

150g (0.336lbs.)

#### Installation

Wall mounting

### + Interface

#### Ethernet Port

10/100/1000BASE-TX: 1 port  
100/1000BASE SFP Slot: 1 port

#### DIP Switch

No.1: LFPT On/Off  
No.2: Auto-Negotiation/Force Mode for TX port  
No.3: Full-duplex/Half-duplex for TX port  
No.4: 100Mbps/10Mbps Force Mode for TX port  
No.5: 100Mbps/1000Mbps for SFP  
No.6: Function Reserved

#### LED Indicators

Per Unit: Power, LFPT  
Per Port: FX/TX Speed, Link/Activity

### + Environment

#### Operating Temperature

0 to 50°C (32 to 121°F)

#### Storage Temperature

-10 to 70°C (-14 to 158°F)

#### Ambient Relative Humidity

5% to 95% (non-condensing)

### + Regulatory Approvals

#### Safety

UL 62368-1


#### ISO

Manufactured in an ISO 9001 facility


#### Emission Compliances

CE Mark Class A  
FCC Part 15B Class A  
VCCI Class A

## 產品應用圖

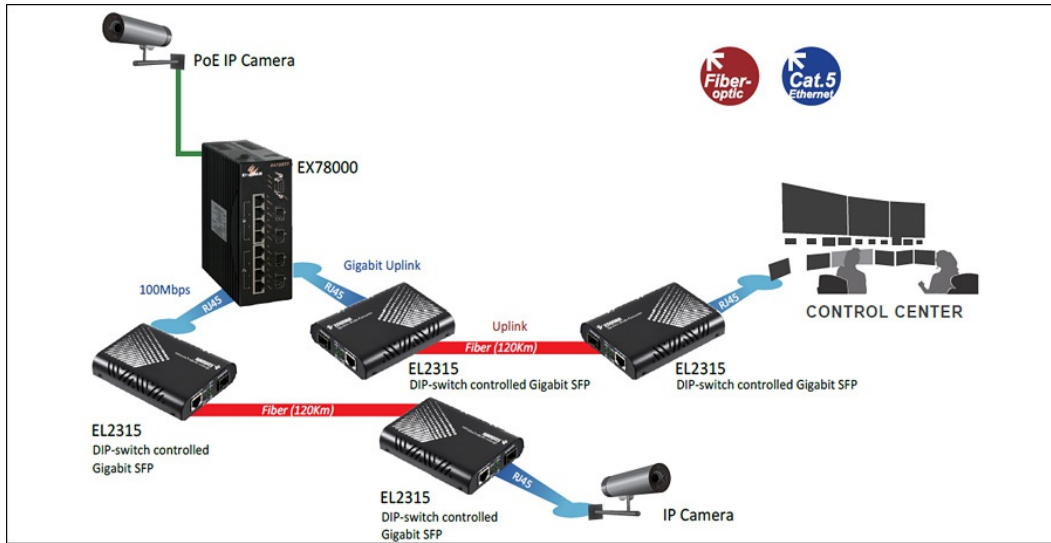

## 產品尺寸圖

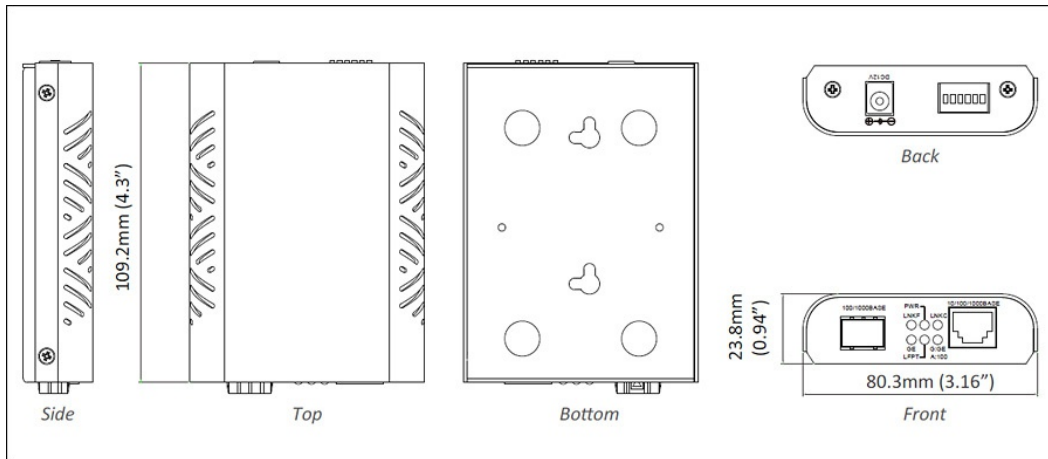

## 訂購型號

### + Model

EL2315 10/100/1000BASE-TX to 100BASE/1000BASE-X Dual Rate SFP Media Converter

### + Gigabit Fiber Transceivers\*

Optional SFP Non-Hardened Type (Operating Temperature: 0 to 70°C/32 to 158°F)

Model Name	Distance	Cable Type	Connector Type	Wavelength	Link Budget**	Optical Output Power	Sensitivity
EX-1250NSP-SB1L S	275m/550m	62.5/125μm/50/125μm, MM	Duplex LC	850nm	7.5dBm	-9.5 to -4dBm	-17dBm
EX-1250TBP-MB1L S	550m	62.5/125μm/50/125μm, MM	Single LC	TX: 1310nm RX: 1550nm	7dBm	-10 to -4dBm	-17dBm
EX-1250TBP-LB1L S	550m	62.5/125μm/50/125μm, MM	Single LC	TX: 1550nm RX: 1310nm	7dBm	-10 to -4dBm	-17dBm
EX-1250TSP-MB4L S	10Km	9/125μm, SM	Duplex LC	1310nm	11.5dBm	-9.5 to -3dBm	-21dBm
EX-1250TBP-MB4L S	10Km	9/125μm, SM	Single LC	TX: 1310nm RX: 1550nm	12dBm	-9 to -3dBm	-21dBm
EX-1250TBP-KB4L S	10Km	9/125μm, SM	Single LC	TX: 1550nm RX: 1310nm	12dBm	-9 to -3dBm	-21dBm
EX-1250TBP-MB5L S	20Km	9/125μm, SM	Single LC	TX: 1310nm RX: 1550nm	15dBm	-8 to -3dBm	-23dBm
EX-1250TBP-KB5L S	20Km	9/125μm, SM	Single LC	TX: 1550nm RX: 1310nm	15dBm	-8 to -3dBm	-23dBm
EX-LS38-C3L-TC-N-EB (DDM)	40Km	9/125μm, SM	Duplex LC	1310nm	20dBm	-3 to +2dBm	-23dBm
EX-LS38-C3L-TC-N-CE (DDM)	40Km	9/125μm, SM	Single LC	TX: 1310nm RX: 1550nm	20dBm	-3 to +2dBm	-23dBm
EX-LS48-C3L-TC-N-CE (DDM)	40Km	9/125μm, SM	Single LC	TX: 1550nm RX: 1310nm	20dBm	-3 to +2dBm	-23dBm

\* More SFP options upon request.

\*\* Link Budget data is based on pair of the same modules.



© EtherWAN Systems, Inc. All rights reserved. 20240603

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.