

## EX34000 Series

Industrial Unmanaged 8-port 10/100BASE PoE (4 x PoE) Ethernet Switch



## Overview

**This product is discontinued as of 28th August 2020. [click here](#) for alternative product.**

EtherWAN's EX34000 Series provides an industrial 8-port switching platform supporting IEEE 802.3af Power over Ethernet, high performance switching with robust features required for mission-critical and harsh environments where sustained connectivity is crucial.

The EX34000 Series is equipped with 4 10/100BASE-TX PoE ports, in combination with two 100FX Fiber options.

The IEEE 802.3af PoE ports provide up to 15.4W/port with a total power budget of 61.6W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements.

EtherWAN — "When Connectivity is Crucial."

## Spotlight

### Industrial Grade

- » Supports -10 to 60°C (14 to 140°F) operating temperature

### PoE Connectivity

- » Port 1 to 4 supports IEEE802.3af Power over Ethernet

### Fiber Connectivity

- » Up to two 100BASE-FX ports with SC and ST options

# Specifications

## Technology

### Standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3af Power over Ethernet
- IEEE 802.3x Full duplex and flow control

### Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

### Packet Buffer Memory

- 1M bits

### Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

### Address Table Size

- 1024 MAC addresses
- 

## Power

### Input

- Redundant power inputs:
  - Terminal Block: 47-55VDC
  - DC Jack: 47-55VDC

### Power Consumption

- Device: Max. 10W (without PoE)
- PoE power budget (depends on power input): 61.6W Max.

### PoE Technology

- Alternative B

Pins 7/8(-), 4/5(+)

### **PoE Power Output**

- Port 1 to 4
- IEEE 802.3af: up to 15.4W/port, 47-55VDC, 350mA Max.

### **Protection**

- Reverse polarity protection
- 

## **Mechanical**

### **Casing**

- Aluminum Case
- IP30

### **Dimensions**

- 62 x 110 x 135mm (W x D x H)  
(2.44" x 4.33" x 5.31")

### **Weight**

- 1Kg (2.2lbs.)

### **Installation**

- DIN-Rail (Top hat type 35mm), Panel, or Rack mounting
- 

## **Interface**

### **Ethernet Ports**

- 10/100BASE-TX: 6, 7 or 8 ports
- 100BASE-FX: 0, 1 or 2 ports

### **LED Indicators**

- Per Unit: Power 1 (Green), Power 2 (Green), Power 3 (Green)
- Per Port: Link/Activity (Green)

### **Alarm Contact**

- One relay output with current 1A/24VDC
- 

## **Environment**

### **Operating Temperature**

- -10 to 60°C (14 to 140°F)

Tested @ -20 to 70°C (-4 to 158°F)

### **Storage Temperature**

- -40 to 85°C (-40 to 185°F)

### **Ambient Relative Humidity**

- 5% to 95% (non-condensing)
- 

## **Regulatory Approvals**

### **ISO**

- Manufactured in an ISO 9001 facility

### **EMI**

FCC Part 15B Class A

VCCI Class A

EN 61000-3-2

EN 61000-3-3

EN 61000-6-4

EN 55022 Class A

### **EMS**

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

EN 55024

### **Environmental Test Compliances**


IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)

---

## Dimensions

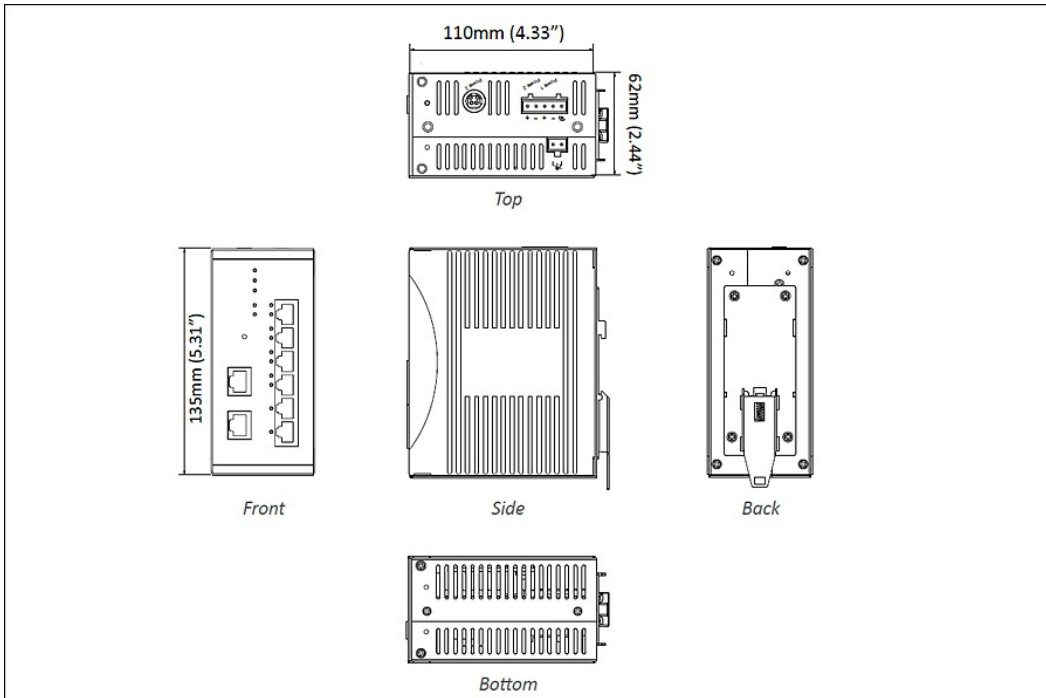

## Ordering Info

### Model

<b>EX34080-00B</b>	8-port 10/100BASE-TX PoE Industrial Unmanaged Ethernet Switch
<b>EX34071-X0B</b>	7-port 10/100BASE-TX +1-port 100BASE-FX PoE Industrial Unmanaged Ethernet Switch
<b>EX34062-X0B</b>	6-port 10/100BASE-TX +2-port 100BASE-FX PoE Industrial Unmanaged Ethernet Switch

\* DIN-Rail mounting kit included.

### 100FX Fiber Options (X)

<b>1</b>	Multi Mode (SC) - 2Km
<b>2</b>	Multi Mode (ST) - 2Km
<b>6</b>	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
<b>7</b>	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
<b>8</b>	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
<b>9</b>	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
<b>A</b>	Single Mode (SC) - 20Km
<b>B</b>	Single Mode (SC) - 40Km
<b>H</b>	Single Mode (ST) - 20Km
<b>P</b>	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
<b>Q</b>	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
<b>R</b>	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
<b>S</b>	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km

\* More 100FX Fiber options also available upon request.

### Optional Accessories

<b>KP-AA96-480</b>	Panel Mounting Kit
<b>KR-BK43-400</b>	Rack Mounting Kit
<b>EXGS-120A-48</b>	Power Supply 120W 48VDC with Latch

EDR-120-48

120W/2.5A DIN-Rail 48VDC Industrial Power Supply

---



© EtherWAN Systems, Inc. All rights reserved. 20221219

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.