

# OttoE PoE Series

Industrial Unmanaged PoE 8 to 10-port Gigabit Ethernet Switch



## Overview

EtherWAN's OttoE PoE series is an industrial unmanaged Gigabit Ethernet switching platform, designed for easy deployment in harsh environments with limited space. Its operating temperature is ranging from - 10°C to 60°C. It is a low-cost, easy-to-use device that combines essential industrial Ethernet networking functionality with rugged performance.

This versatile switch features full/half-duplex auto-negotiation and auto MDI/MDIX operation, allowing for convenient connection of a variety of network devices. QoS (Quality of Service) support allows for traffic prioritization and effective management of resources. A built-in watchdog feature supports the OttoE PoE switch as an intelligent device to prevent packet loss from powered devices in the network. The feature can be enabled per port via DIP switch to enhance the feature flexibility.

EtherWAN — "When Connectivity is Crucial."

## Highlight

### + PoE Features

IEEE 802.3bt 90W per port  
Total power budget up to 270W

### + High Reliability

Industrial Fanless Design  
6Kv surge protection

### + PoE Watchdog (Patented)

Monitor data and remotely reboot the PD

### + Quality of Service

PROFINET, EtherNet/IP

### + SFP Connectivity

Up to two 100/1000BASE SFP option

## Specifications

### + Interface

#### Ethernet

10/100/1000BASE-TX: 8 ports

100/1000BASE-SFP: 0 or 2 ports

#### LED Indicators

Per Unit: Power 1 (Green), Power 2 (Green), Fault (Red)

Per Port: Link/Activity (Green)

#### Alarm Contact

One relay output with current 0.5A@48VDC

#### Dip Switch

No.1 - 8: Port 1 to 8 Watchdog ON/OFF

EXT: The timer enables Watchdog (ON: 5 min. / OFF: 10 min.)

### + Technology

#### Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/FX

IEEE 802.3az Energy Efficient Ethernet

IEEE 802.1p Quality of Service (QoS)

IEEE 802.3ab 1000BASE-T

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3af/at/bt Power over Ethernet

#### Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

#### Packet Buffer Memory

1.5M bits

#### Processing Type

Store-and-Forward

Auto Negotiation

Half-duplex back-pressure and IEEE

Auto MDI/MDIX

#### Address Table Size

4K MAC

### + Environmental

#### Operating Temp.

-10 to 60°C (14 to 140°F)

#### Storage Temp.

-40 to 85°C (-40 to 185°F)

#### Relative Humidity

5% to 95% (non-condensing)

### + Regulatory

#### ISO

Manufactured in ISO-9001 facility

#### EMI

FCC Part 15 Class A

VCCI Class A

EN 61000-6-4

ICES-003

EN 55032

#### EMS

EN 61000-6-2

- EN 61000-4-2 (ESD)

- EN 61000-4-3 (Radiated RFI)

- EN 61000-4-4 (Burst)

- EN 61000-4-5 (Surge)

- EN 61000-4-6 (Induced RFI)

- EN 61000-4-8 (Magnetic field)

#### Safety

UL 61010

#### Environmental Test Compliance

IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

IEC 60068-2-31 (Free fall w/package)

#### Industrial

EN 50121-4

#### Traffic

NEMA TS2 (TG103H)

## + Power

### Input

46-57VDC (Terminal Block)

### Power Consumption

9.72W (without PoE)

### Protection

Reverse Polarity Protection

### PoE Power Output

Up to 90W/port

Power Budget: 270W

\*\*

46-57VDC for IEEE 802.3af type 1, ≤15.4W PD devices.

52-57VDC for IEEE 802.3at/bt type 2/3, 30W, 60W PD devices.

54-57VDC for IEEE 802.3bt, type 4, 90W PD devices.

## + Physical

### Casing Material

Metal

### IP Rating

IP30

### Dimensions

45x125x145mm (W x D x H) (1.77"x4.92"x5.71")

### Weight

577g (1.27lbs)

### Installation Type

DIN-Rail (Top hat type 35mm) mounting

## + Warranty

### Length

Limited Lifetime

### Details


[www.etherwan.com/support/warranty-policy](http://www.etherwan.com/support/warranty-policy)

## + What's Included


### Device

Ethernet switch

# Dimensions

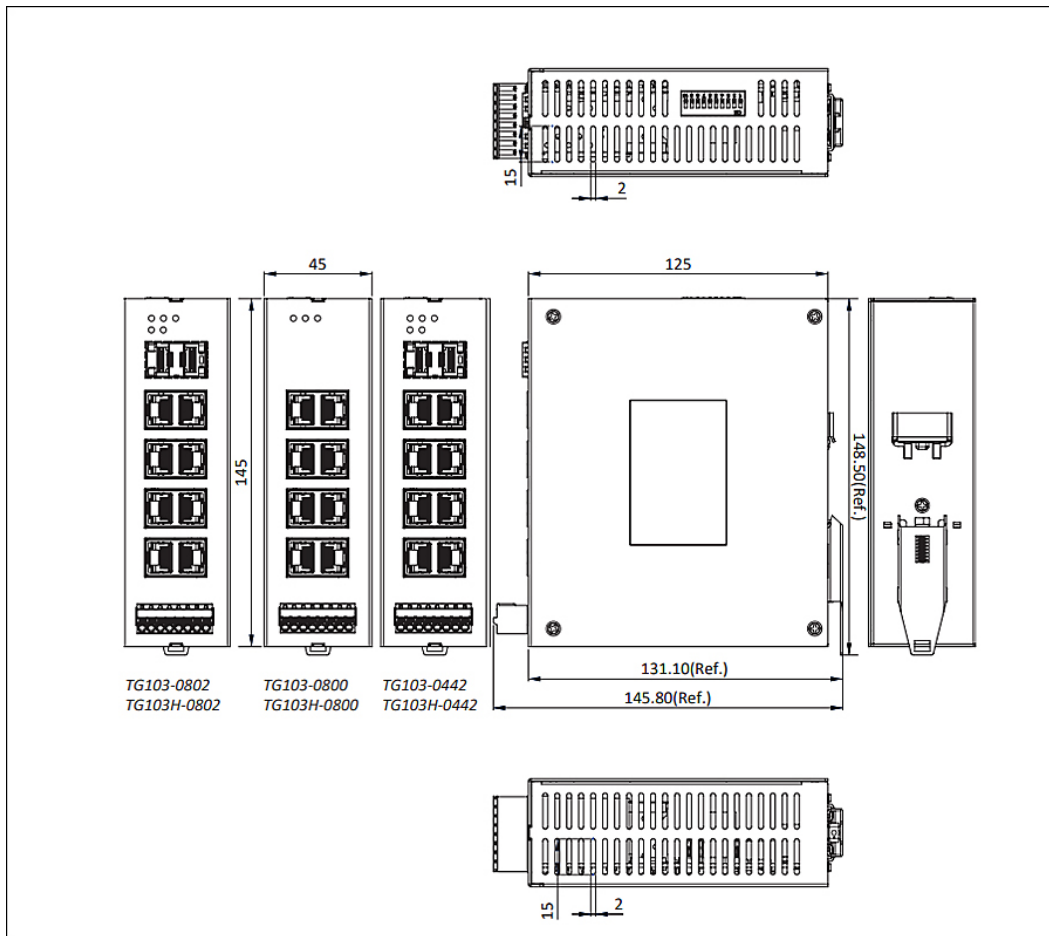

# Application

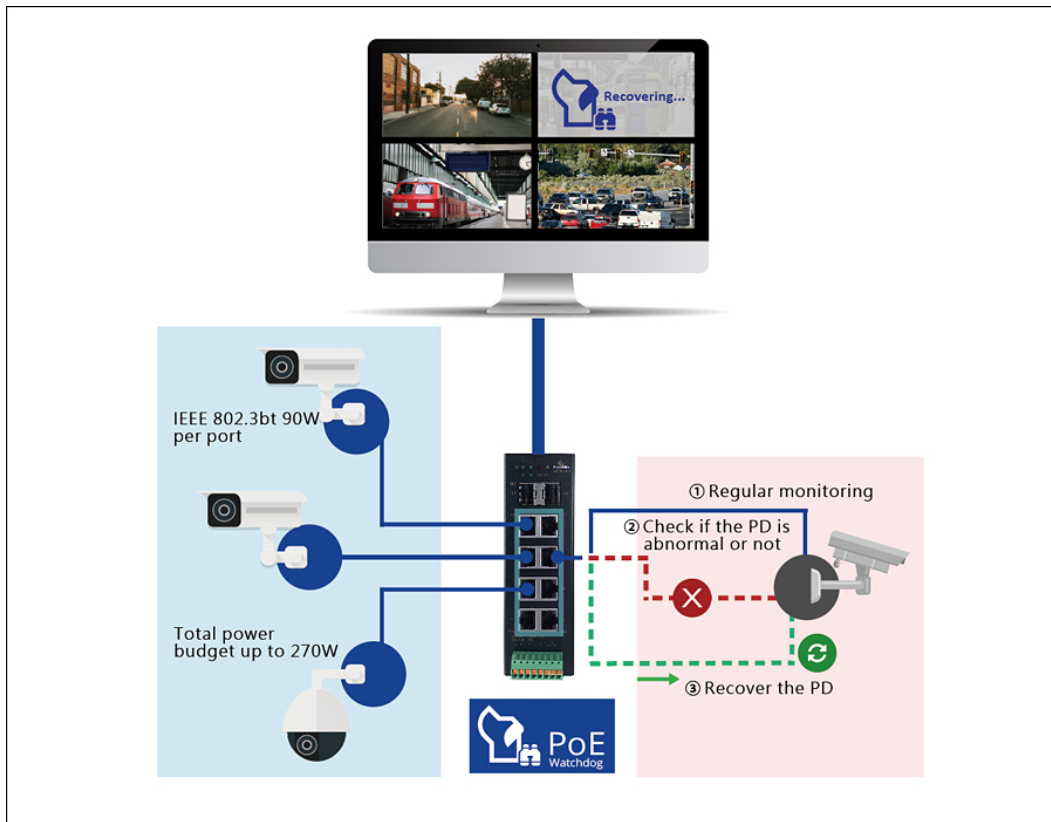

## Ordering Info

### + Model

#### Gigabit Ethernet Models

<b>TG103-0800</b>	8-port 10/100/1000BASE-TX PoE Industrial (-10 to 60°C) Unmanaged Switch
<b>TG103-0802</b>	8-port 10/100/1000BASE-TX PoE + 2-port 100/1000BASE SFP Industrial (-10 to 60°C) Unmanaged Switch
<b>TG103-0442</b>	4-port 10/100/1000BASE-TX PoE + 4-port 10/100/1000BASE-TX + 2-port 100/1000BASE SFP Industrial (-10 to 60°C) Unmanaged Switch
<b>TG103H-0800</b>	8-port 10/100/1000BASE-TX PoE Hardened (-40 to 75°C) Unmanaged Switch
<b>TG103H-0802</b>	8-port 10/100/1000BASE-TX PoE + 2-port 100/1000BASE SFP Hardened (-40 to 75°C) Unmanaged Switch
<b>TG103H-0442</b>	4-port 10/100/1000BASE-TX PoE + 4-port 10/100/1000BASE-TX + 2-port 100/1000BASE SFP Hardened (-40 to 75°C) Unmanaged Switch

Part Number	Speed Info	Speed Info	Distance	Operating Temperature	Wavelength	DDM
<b>EX-0155NSP-MB2L-A</b>	100Mbps	Multi	2km	-40 to 85°C	1310nm	
<b>SFPMIS20M</b>	100Mbps	Single	20km	-40 to 85°C	1310nm	✓
<b>SFPGIM5AM</b>	1000Mbps	Multi	275m/550m	-40 to 85°C	850nm	✓
<b>SFPGIM02M</b>	1000Mbps	Multi	2km	-40 to 85°C	1310nm	✓
<b>SFPGIS10M</b>	1000Mbps	Single	10km	-40 to 85°C	1310nm	✓

### + Optional Accessories

<b>NDR-480-48</b>	480W 48VDC DIN-Rail Power Supply
-------------------	----------------------------------

100BASE SFP Modules	<a href="http://www.etherwan.com/products/sfp-fiber-transceiver">www.etherwan.com/products/sfp-fiber-transceiver</a>
Gigabit SFP Modules	<a href="http://www.etherwan.com/products/sfp-fiber-transceiver">www.etherwan.com/products/sfp-fiber-transceiver</a>

