

# EX77000 Series

Hardened Managed 24-port 10/100BASE and 4-port Gigabit Ethernet Switch with SFP options



## Overview

EtherWAN's EX77000 series provides a hardened-graded fully managed 28-port switching platform combining high performance switching backbone with robust and secure management features required for mission critical and harsh environments where sustained connectivity is crucial.

The EX77000 series equipped with 24 fast Ethernet ports and 4 gigabit uplink ports with fixed fiber or SFP options, allows for fan-less operation in high EMI and vibration environments with a temperature range from -40 to 75°C (-40 to 167°F).

Users are able to access EX77000 management features such as port security, IGMP snooping, VLANs, GARP protocols, and LACP, via web browser, Telnet, SNMP, RMON, TFTP, and RS-232 console interfaces.

EX77000 is also NEMA-TS2 certified for traffic applications, it can be mountable on a 1U rack, and is equipped with EtherWAN's Alpha-Ring self-healing technology, providing less than 15ms fault recovery time making it ideal for applications intolerant to interruption.

EtherWAN — "When Connectivity is Crucial."

## Spotlight

### + Versatile Connectivity

Provides flexibility of 24-port 10/100BASE-TX/FX/BX/SFP plus 4-port Gigabit-TX/SX/LX/BX/SFP

### + Secure Remote Access

IEEE 802.1x, ACL (Access Control List), and RADIUS support

### + Hardened Grade

Wide operating temperature range for extreme environments  
 Fanless and ruggedized housing  
 High shock and electric noise immunity

## Features

### + Interface

CLI, Telnet and Web Browser  
SNMP v1/v2c/v3

### + Management

Firmware and configuration upgrade and backup via TFTP  
Supports DHCP Server/Client  
RMON (Remote Monitoring)  
Port mirroring: TX/RX and both  
NTP (Network Time Protocol) time synchronization  
IEEE 802.1ab LLDP (Link Layer Discovery Protocol)  
IPv4/IPv6

### + Security

MAC address filtering  
Enable/Disable port  
Storm control (Broadcast and multicast types)  
IEEE 802.1x LAN access control  
Remote authentication through RADIUS and TACACS+  
SSHv1/v2 for CLI and Telnet security  
SSL for web security  
ACL  
System log (Remote/Local)  
Multi-level user account/password against unauthorized configuration

### + Quality of Service (QoS)

Priority Queues: 4 queues per port  
Traffic classification based on IEEE 802.1p CoS, DSCP, WRR (Weighted Round Robin) and strict mode  
Rate Limiting (Ingress/Egress)

### + Layer 2 Features

**Auto-negotiation for port speed and duplex**  
Flow Control  
IEEE 802.3x full duplex mode  
Back-pressure half duplex mode

**Redundant Protocol**  
IEEE 802.1D Spanning Tree Protocol (STP)  
IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)  
IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)  
EtherWAN's Alpha-Ring network fault recovery (<15ms) and Alpha-Chain

**VLANs**  
Port-based VLANs  
IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)  
GVRP (GARP VLAN Registration Protocol)  
GMRP (GARP Multicast Registration Protocol)

**Link Aggregation**  
Static Trunk (8 groups, support MAC base)  
IEEE 802.3ad Link Aggregation Control Protocol

**IGMP Snooping**  
IGMP Snooping v1/v2/v3

### + Performance

Switching Capability: 12.8Gbps  
Jumbo Frame: 9K bytes

## Specifications

### + Technology

#### Standards

IEEE 802.3 10BASE-T  
IEEE 802.3u 100BASE-TX/100BASE-FX  
IEEE 802.3ab 1000BASE-T  
IEEE 802.3z 1000BASE-SX/1000BASE-LX  
IEEE 802.3x Full duplex and flow control  
IEEE 802.1p QoS  
IEEE 802.1Q Tag VLANs  
IEEE 802.1w RSTP  
IEEE 802.1x Port-based Network Access Control

#### Forward and Filtering Rate

14,880pps for 10Mbps  
148,810pps for 100Mbps  
1,488,100pps for 1000Mbps

#### Packet Buffer Memory

12M bits

#### Processing Type

Store-and-Forward  
Auto Negotiation  
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control  
Auto MDI/MDIX

#### Address Table Size

16K MAC addresses

### + Interface

#### Ethernet Port

10/100BASE-TX: 0, 8, 16 or 24 ports  
100BASE-FX: 0, 8, 16 or 24 ports  
Gigabit: 4 ports

#### Console Port

One DB9 RS-232 port

#### Alarm Contact

One relay output with current 0.6A/30VDC

#### LED Indicators

Per Unit: Power, Alarm  
Per Port: Link/Activity (Green)  
Per SFP Slot: Selected (Green)

### + Environment

#### Operating Temperature

-40 to 75°C (-40 to 167°F)  
Tested @ -40 to 85°C (-40 to 185°F)

#### Storage Temperature

-45 to 85°C (-49 to 185°F)

#### Ambient Relative Humidity

5% to 95% (non-condensing)

## + Power

### Input

Power input can be configured as:

- (T): ±48VDC Internal Universal PSU
- (W): 88-300VDC or 100-240VAC Internal Universal PSU
- (C): 100-240VAC, 50-60Hz Internal Universal PSU

### Power Consumption

For models with all copper ports: EX77604 Series:  
21.9W@230VAC

For models with all fiber ports: EX77064 Series:  
40.6W@230VAC

## + Mechanical

### Casing

Metal Case  
IP30

### Dimensions

Redundant Power: 442 x 375 x 44mm (W x D x H)  
(17.4" x 14.7" x 1.73")

Single Power: 442 x 250 x 44.2mm (W x D x H)  
(17.4" x 9.8" x 1.74")

### Weight

5Kg (11lbs.)

### Installation

Rack mounting

## + Regulatory Approvals

### ISO

Manufactured in an ISO 9001 facility

### Safety

- UL 62368

### EMI

- FCC Part 15B Class A
- EN 61000-6-4

### EMS

- EN 61000-6-2
- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)


### Environmental Test Compliance

- IEC 60068-2-6 Fc (Vibration Resistance)
- IEC 60068-2-27 Ea (Shock)
- FED STD 101C Method 5007.1 (Free fall w/package)



### Industrial Compliance

- NEMA TS2

# Application

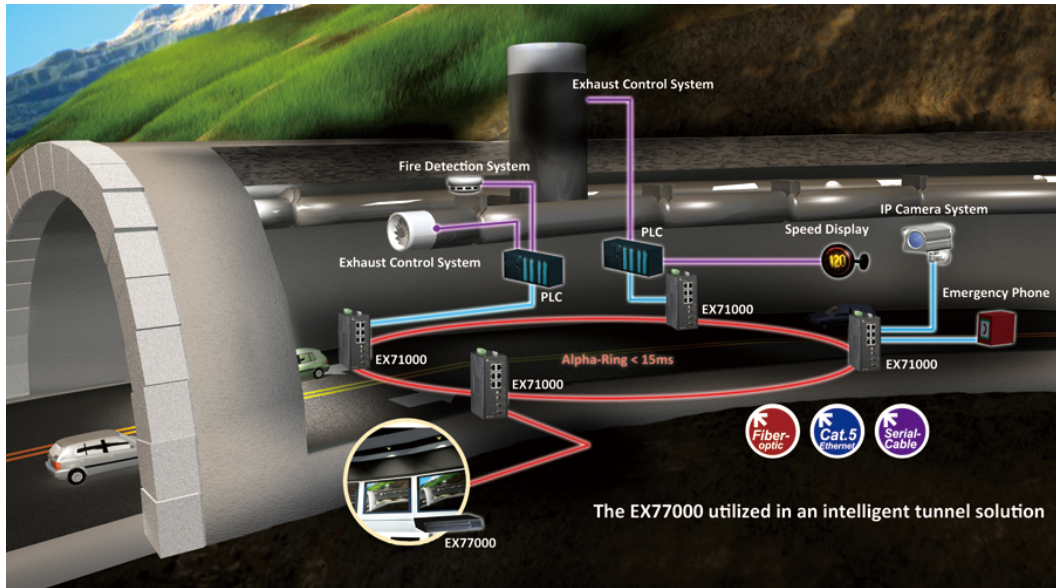

# Dimensions

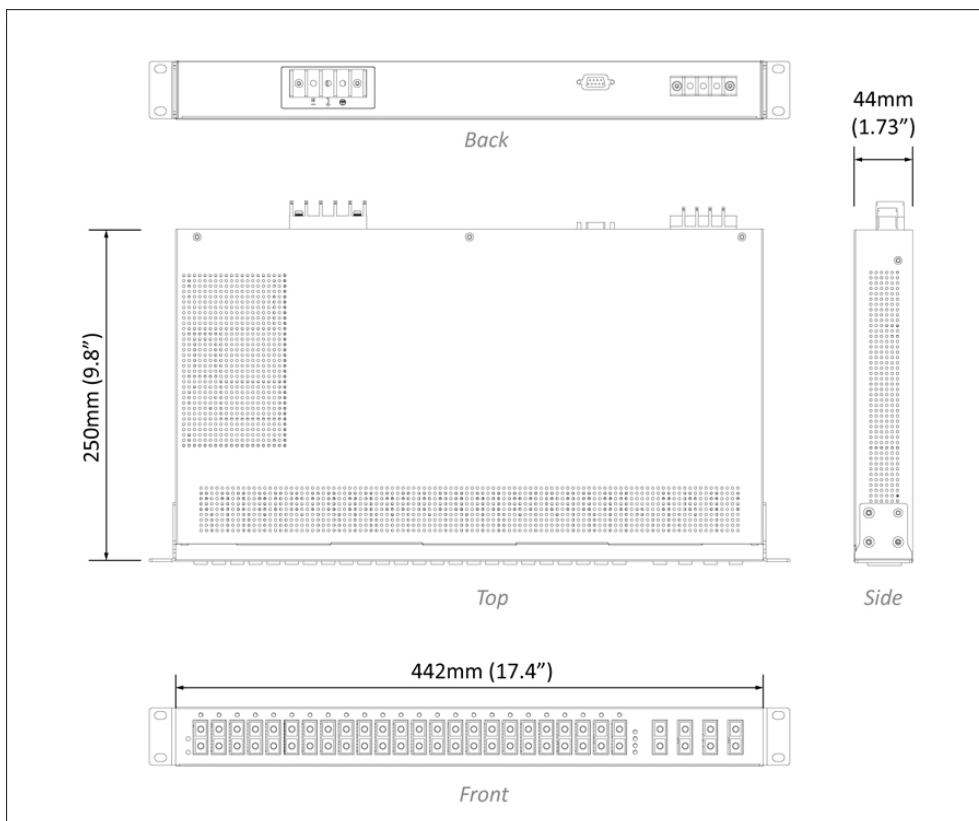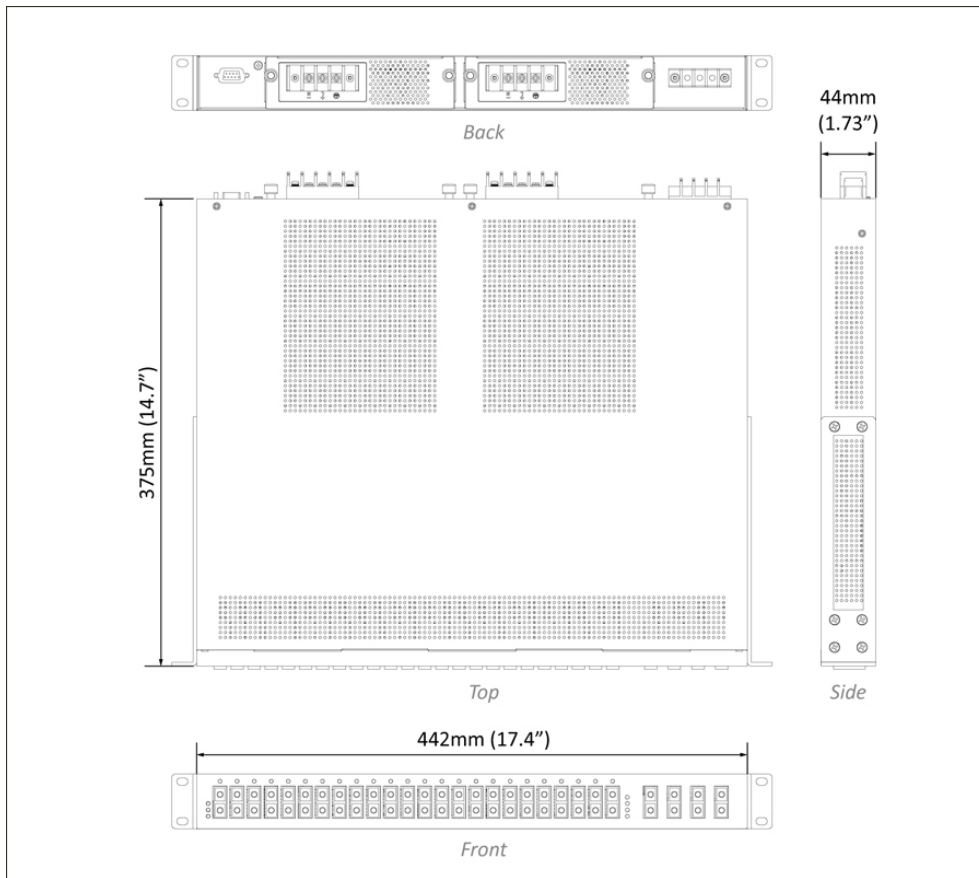

## Ordering Info

### + Model

<b>EX77604-0XYZ</b>	24-port 10/100BASE-TX +4-port Gigabit Managed Ethernet Switch
<b>EX77424-WXYZ</b>	16-port 10/100BASE-TX +8-port 100BASE-FX +4-port Gigabit Managed Ethernet Switch
<b>EX77244-WXYZ</b>	8-port 10/100BASE-TX +16-port 100BASE-FX +4-port Gigabit Managed Ethernet Switch
<b>EX77064-WXYZ</b>	24-port 100BASE-FX +4-port Gigabit Managed Ethernet Switch
<b>EX77064-V0VZ</b>	24-port 100BASE-SFP +4-port Gigabit SFP Combo Managed Ethernet Switch

\* Rack mounting kit included.

### + 100FX Fiber Options (W)

<b>1</b>	Multi Mode (SC) - 2Km
<b>2</b>	Multi Mode (ST) - 2Km
<b>A</b>	Single Mode (SC) - 20Km
<b>H</b>	Single Mode (ST) - 20Km
<b>P</b>	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
<b>Q</b>	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
<b>V</b>	SFP

### + Numbers of fixed Gigabit Fiber (X)

<b>0</b>	None
<b>4</b>	Four Gigabit Fiber Ports

### + Gigabit Port Options (Y)

<b>3</b>	1000BASE-SX (SC) - 550m
<b>4</b>	1000BASE-SX (SC) - 2Km
<b>A</b>	1000BASE-LX (SC) - 10Km
<b>B</b>	1000BASE-LX (SC) - 20Km
<b>R</b>	1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
<b>S</b>	1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
<b>V</b>	4-port 100/1000BASE SFP Combo with 10/100/1000BASE-TX

### + Power Input Interface (Z)

<b>T</b>	±48VDC (Terminal Block)
<b>W</b>	88-300VDC or 100-240VAC (Terminal Block)
<b>C</b>	100-240VAC (AC Inlet)
<b>TR</b>	±48VDC Redundant (Terminal Block)
<b>WR</b>	88-300VDC or 100-240VAC Redundant (Terminal Block)
<b>CR</b>	100-240VAC Redundant (AC Inlet)



© EtherWAN Systems, Inc. All rights reserved. 20241017

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.